



Australian Government

PCT/AU2004/000978

Patent Office
Canberra

I, LEANNE MYNOTT, MANAGER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. 2003903788 for a patent by NAUTITECH PTY LTD as filed on 22 July 2003.

WITNESS my hand this
Twenty-fifth day of November 2004

A handwritten signature in black ink, appearing to be 'L. Mynott'.

LEANNE MYNOTT
MANAGER EXAMINATION SUPPORT
AND SALES



AUSTRALIA

Patents Act 1990

Nautitech Pty Ltd

PROVISIONAL SPECIFICATION

Invention Title:

Single clutch transmission

The invention is described in the following statement:

Field of the Invention

The present invention relates to a single clutch transmission and in particular, the invention relates to a single clutch automated manual transmission which is particularly suited for use in marine applications.

5

Background of the Invention

In most existing marine drives in watercraft, a marine engine is coupled to a propeller via a gear box which provides a single gear ratio. The speed of the watercraft is controlled by controlling the engine speed via a throttle. Generally speaking, 10 watercraft are geared so that they run most efficiently at their intended cruising speed. A large yacht may be designed to cruise at 35 to 40 knots and is thus geared to be most efficient and controllable at or around that speed. However a problem with this arrangement is that such craft are very difficult to operate at the low speeds that may be required for example, when docking the craft. It is very difficult to dock a boat safely 15 if, for example, the lowest speed that the boat will satisfactorily travel at, is around 10 knots. It is also, in some cases, desirable to have a low gear ratio for applications where increased torque is required, with a higher gear ratio for high speed operation.

Although a number of multi-speed drive transmissions have been proposed for watercraft, they suffer from a number of problems. For example, US 6,350,165 20 discloses a watercraft which incorporates a two forward speed plus one reverse speed transmission. The transmission is based on a planetary gear apparatus and is consequently relatively high cost. The transmission has a further problem in that because of the way the gearing is arranged, it is not possible to vary the gear ratios easily, since all the gear wheels must be changed. It is thus harder to package and 25 adapt planetary gearing systems to suit different applications, engine sizes and the like.

It is an object of the present invention to address or alleviate at least some of the problems of the prior art.

Any discussion of documents, acts, materials, devices, articles or the like which has been included in the present specification is solely for the purpose of providing a 30 context for the present invention. It is not to be taken as an admission that any or all of these matters form part of the prior art base or were common general knowledge in the field relevant to the present invention as it existed before the priority date of each claim of this application.

Summary of the Invention

According to the present invention there is provided a two speed transmission including:

- an input shaft;
- 5 a lay shaft spaced from the input shaft;
- a first gear train connecting the input shaft to the lay shaft;
- a second gear train connecting the lay shaft to an output shaft the gear train including a one way clutch; and
- a clutch for engaging the input shaft with the output shaft the arrangement being
- 10 such that when the output shaft is disengaged from the input shaft power is transmitted to the output shaft via the first and second gear trains and the lay shaft.

A dog clutch is preferably provided for disengaging the lay shaft when in reverse.

- When the clutch is disengaged, power is transmitted from the input shaft via the
- 15 gear trains and the lay shaft via the one way clutch to the output shaft which typically provides first or low gear for use in low speed manoeuvring or where greater torque is required. With the clutch engaged, power may be transmitted from the input shaft directly to the output shaft to provide a second gear for when the watercraft is cruising.

- This transmission system has the advantage of being extremely compact and
- 20 since, it requires only a single clutch, provides reduced drag compared with transmission systems incorporating more than one clutch. Advantageously, the default for the transmission has the one way clutch in the first or lower gear, with the clutch normally on, so that if the system fails, it is always possible for the boat owner to get the boat home albeit at a slower speed.

- 25 In a preferred embodiment means for disengaging the one way clutch are provided to allow the output shaft to be run in reverse. The means may be mechanically, hydraulically or electromechanically operated.

Brief Description of the Drawings

- 30 A specific embodiment of the present invention will now be described by way of example only and with reference to the accompanying drawings in which:

Figure 1 is a schematic diagram of the stern of a watercraft including a bravo type stern drive transmission;

- Figure 2 is a schematic diagram of a first embodiment of a transmission
- 35 embodying the present invention;

Figure 3 shows the transmission of Figure 2 with a control system superposed;

Figure 4 is a schematic diagram of a second embodiment of a transmission embodying the present invention;

Figure 5 shows the transmission of Figure 4 with a control system superposed; and

5 Figure 6 is a schematic diagram of the stern of a watercraft having a alpha type stern drive transmission.

Detailed Description of a Preferred Embodiment

Referring to the drawings, Figure 1 shows the stern of a watercraft 10 having a hull 12. A stern drive unit 16 incorporating a single clutch automated manual transmission 18 is located behind the transom 20 of the watercraft, an engine (not shown) is located inside the hull and an output shaft 22 from the engine projects generally horizontally from the stern of the watercraft provides power to the stern drive unit 16. This type of marine propulsion system is also commonly referred to as an "inboard/outboard drive".

The output shaft of the watercraft 22 spins about a generally horizontal axis. A bevel gear 24 is fixed to the distal end of the output shaft. The bevel gear 24 defined at the end of the output shaft meshes with forward and reverse bevel gears 26, 28 respectively and a dog clutch 30 moves in the direction of arrow "A" to connect a vertical output shaft 32 with the forward bevel gear 26, or in the direction "B" to connect the vertical output shaft 32 with the reverse bevel gear 28, or vice versa depending on whether a right or left hand propeller is fitted. A lower part 34 of the vertical output shaft is operatively connected to a further pair of meshing bevel gears 36, 38 which convert the vertical axis movement of the output shaft 34 to a generally horizontal shaft 40 driving a propeller 42. The above arrangement is typical of existing marine stern drive systems and is commonly known in some areas as a "Bravo" drive. Figure 6 illustrates the system in use with an "alpha" type drive instead of the bravo drive shown in Figure 1. In this case the output shaft 24 is directly connected to input shaft 32 via bevel gears 24 and 28 and forward and reverse are provided at the lower end of the drive adjacent the propeller 40 selected via a dog clutch 120. The present invention is concerned with a transmission system and control means which not only provide two speed drive for the watercraft but also provide a number of other advantages over existing marine transmission systems.

Figure 2 shows a first embodiment of a single clutch automated manual transmission 18. The vertical output shaft from the bravo drive 32 is the input shaft 32 for the transmission apparatus of the present invention. Bearings 34 support the shaft.

A gear 36 is mounted on the exterior of the input shaft 32. Gear 36 meshes with a gear 38 mounted on a lay shaft 40 extending parallel to the input shaft 32. The gear may either be engaged with the lay shaft for rotation therewith or free to spin about the lay shaft depending on the position of a shift mechanism 42. The shift mechanism is shown in two positions in Figure 2 engaged at 44 and disengaged at 46. The shift mechanism may be operated hydraulically, mechanically, or electrically or by any other suitable means.

A one way clutch 48 is fixed to the lower end of the lay shaft 40 and a gear 49 encompassing the one way clutch meshes with a gear wheel 50 fixed to an output shaft 52. The one way clutch will hold torque in one direction and freely rotate in the other.

A clutch 54 is located between the upper end of the output shaft, and the lower end of the input shaft for engaging the two shafts. When the clutch is disengaged, power is transmitted from the input shaft via gears 36,38 to the lay shaft 40 and thence, via the one way clutch 48 to the output gear shaft 52 via gear 50. This provides first gear for use in low speed manoeuvring or where greater torque is required. When the clutch is engaged, power is transmitted from the input shaft 32 directly to the output shaft 52. This provides second gear for when the watercraft is cruising. The gears 36, 38 remain meshed, and the one way clutch 48 on the lay shaft remains still meshed with the gear 52 and in this condition the one way clutch 48 will rotate more slowly than the shaft 52 and will over run.

With this transmission either first or second gear is always engaged depending on the position of the clutch. This avoids the problem of torque interrupt.

In order to run the shaft in reverse with a bravo type drive, it is necessary to provide mechanical or other means of a disengaging the one way clutch by for example, mechanically, hydraulically or electromechanically moving the lay shaft away from the output shaft. In the described embodiment this function is provided by the shift mechanism 42. In reverse gear 50 will cause the one way clutch to drive lay shaft 40 through the one way clutch, but with gear 38 disengaged by the shift mechanism the lay shaft 40 simply spins freely. The shift mechanism is required to prevent second gear operating in reverse and the one way clutch is rotating in the opposite direction and will lock up with shaft 52 which rotates at a different speed to the one way clutch in second gear.

A control system illustrated in Figure 3 is provided for controlling the transmission. The control system includes an electronic control unit (ECU) 60 linked to various sensors. The system includes sensors 62 and 64 measuring the speed of the input shaft and output shafts respectively and sensors 68 providing information about

the position of the gears, sensors 66 providing information about to the engine's throttle position, and sensors 70 providing information concerning the temperature of the systems hydraulic fluid. Alternatively, some of this information can be collected off the common vessel/engine BUS or CAN.

5 Figure 3 also shows a valve body 80 containing a control valve and an electro-hydraulic solenoid 82 to activate control clutch slip as described in more detail below. The position of the solenoid 82 is also fed to the ECU 60. Figure 3 also illustrates a hydraulic pump 84 used for maintaining hydraulic pressure in the system's hydraulic controls. The system also includes position sensors for sensing the position of the
10 clutch.

The system of clutch slipping may also be used for the for docking functions where very low speeds of the order of a few knots may be desired and wherein clutch slip may be used to dissipate excess rotational speed of the output shaft to allow slower movement of the boat whilst maintaining throttle speed.

15 The one way clutch may be a roller clutch, sprag clutch, ratchet clutch or similar.

When the transmission may is used with the "alpha" type stern drive of Figure 6 where the choice of forward and reverse gearing is provided at the lower end of the output shaft adjacent the propeller, there is no requirement for a means for disengaging
20 the one way clutch. Figures 4 and 5 illustrate such a transmission 18a in which components which are identical to those of transmission 18 share the same reference numerals. The only significant difference is the absence of the shift mechanism 42.

This transmission system has the advantage of being extremely compact and since, it requires only a single clutch, provides reduced drag compared with
25 transmission systems incorporating more than one clutch. Advantageously, the default for the transmission has the transmission in the first or lower gear, with the clutch normally off, so that if the system fails, it is always possible for the boat owner to get the boat home albeit at a slower speed.

Although the transmission of the present invention is described in the context of
30 a stern drive and is particularly suited for marine applications, it will be appreciated that it can be used as part of a transmission system of any vehicle and it is particularly suited to use where size and space are at a premium and where reduced cost and simplicity are particular advantages such as in marine outboards. It is also envisaged that the system might be particularly suitable for providing two speed transmissions for
35 fork lift trucks and the like.

Further, although the system is described as being incorporated in the stern drive unit of an inboard/outboard marine propulsion system, it will be appreciated that the system could also be incorporated in outboard systems where the engine and transmission systems are all located behind the transom due to its compact size and
5 light weight. It could also be used in variations of shaft drive and v-drive marine propulsion systems between the engine and the propeller. The transmission could also be used to drive an impeller with "jet drive" applications.

It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the invention as shown in the specific
10 embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.

Dated this twenty second day of June 2003

Nautitech Pty Ltd
Patent Attorneys for the Applicant:

F B RICE & CO

1/6

10

5

12

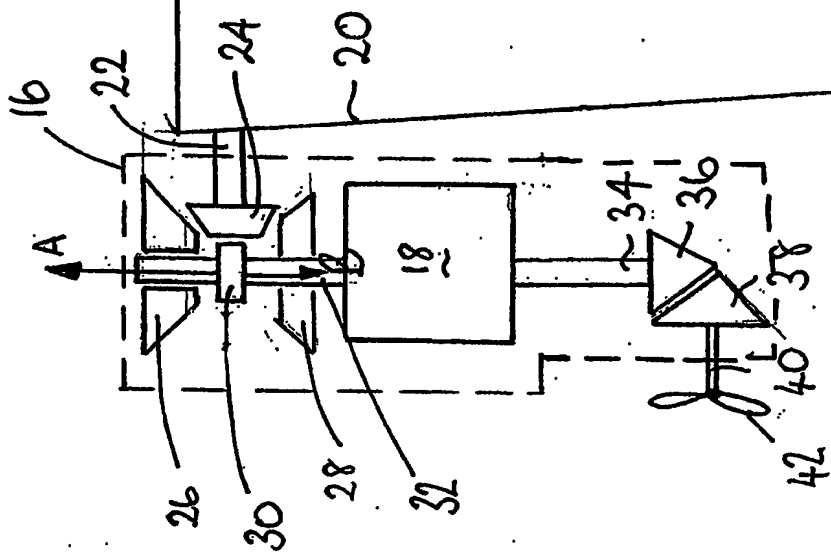


Figure 1


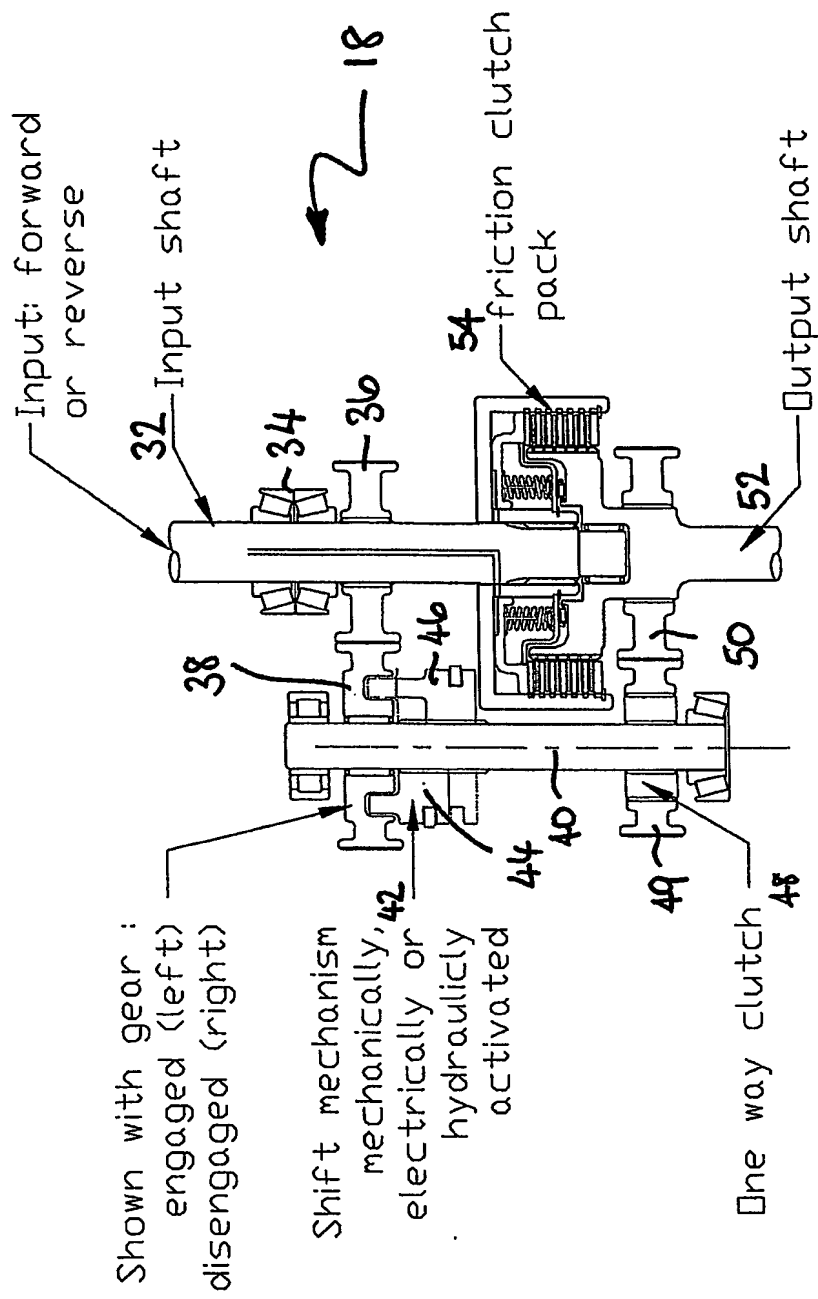


Figure 2

3/6

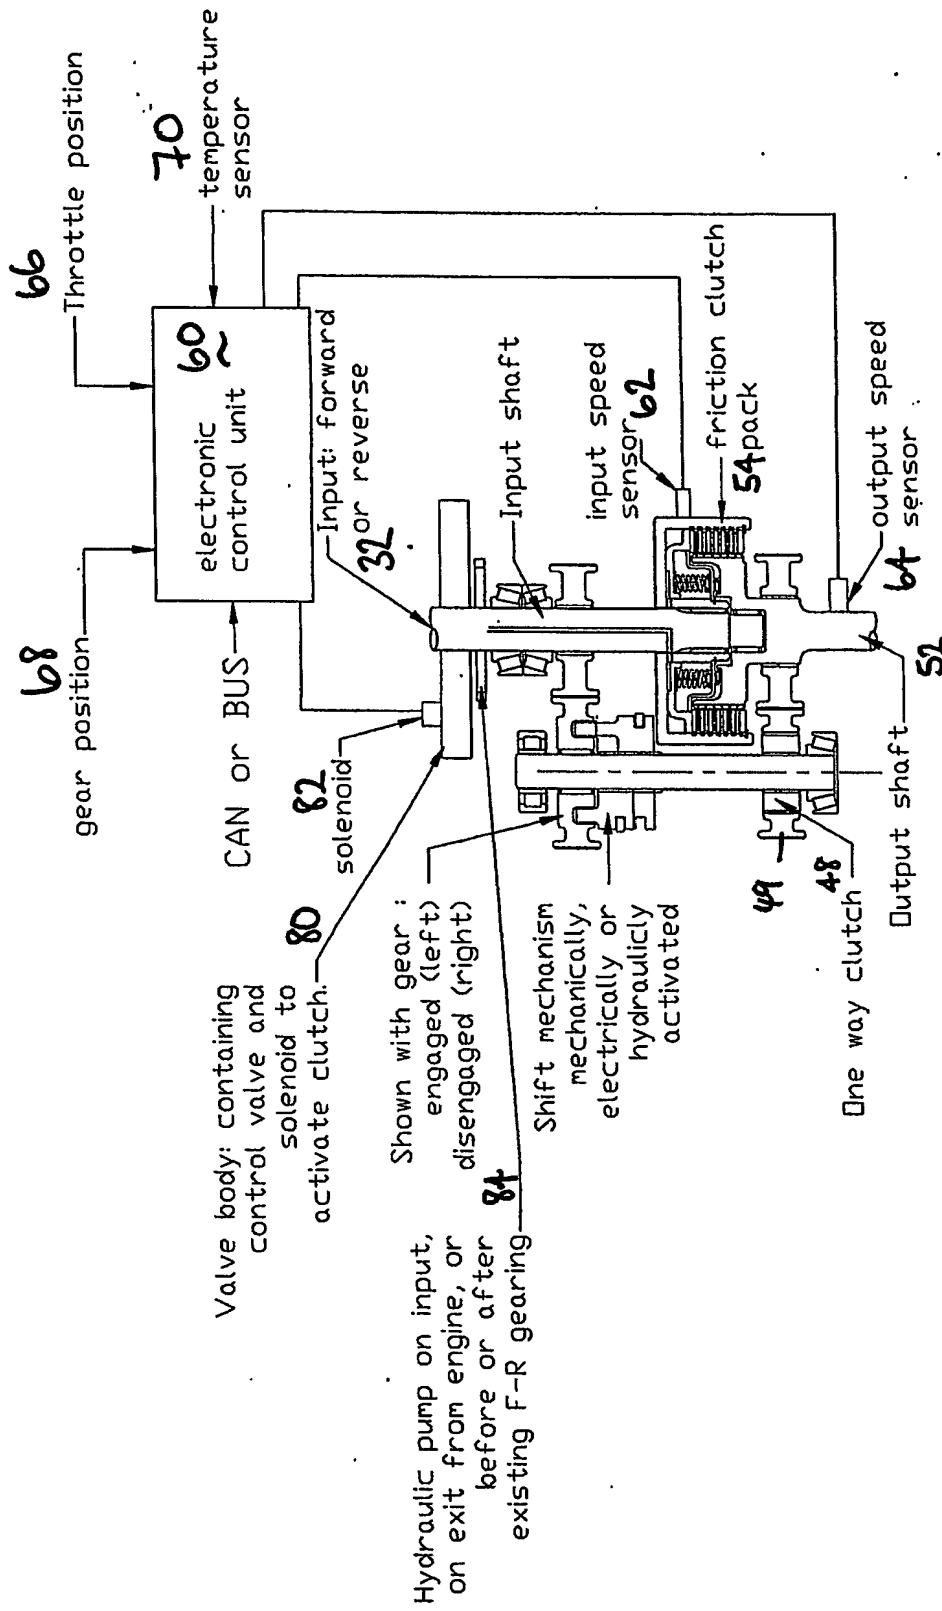

Figures 3

4/6

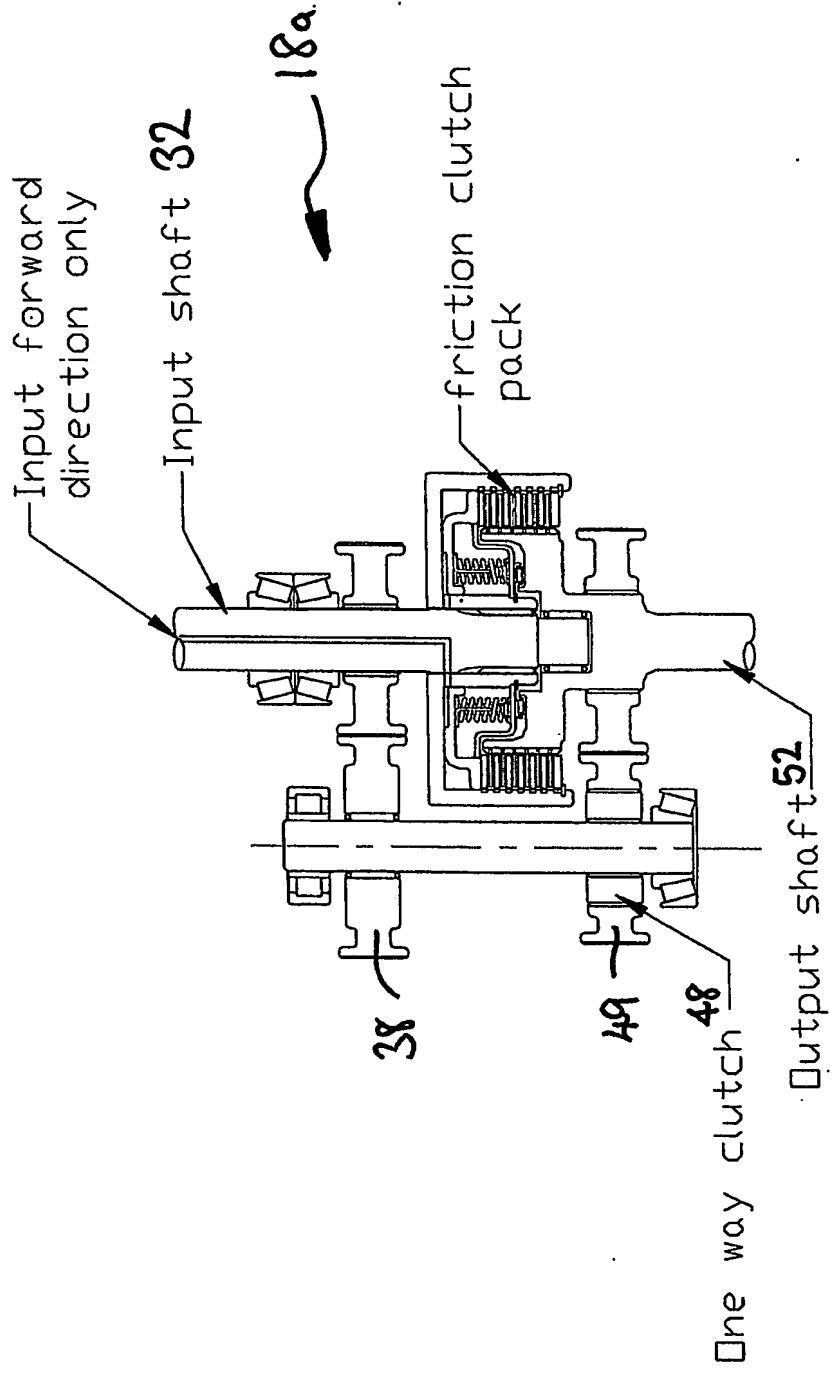


Figure 4

5/6

2-18a

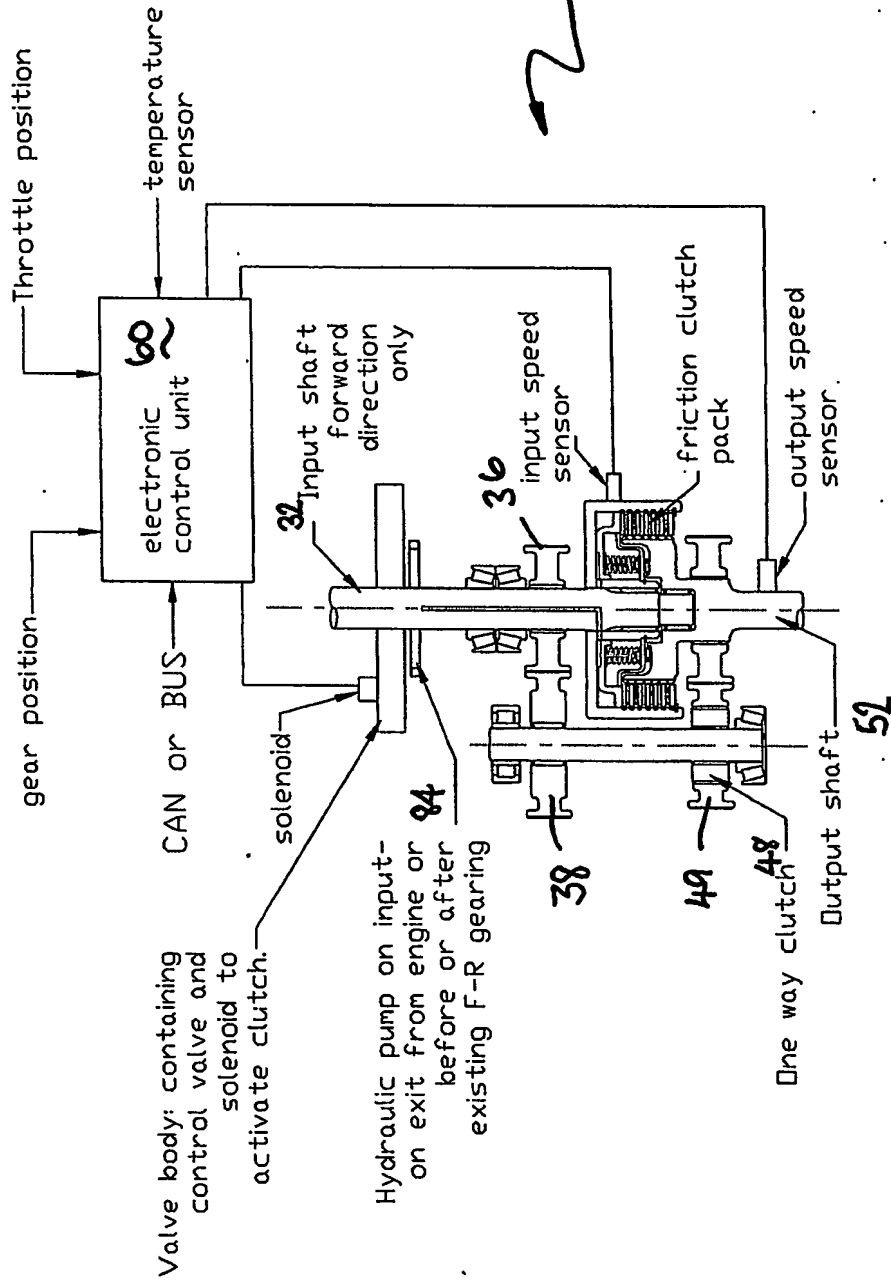


Figure 5

6/6

10
5

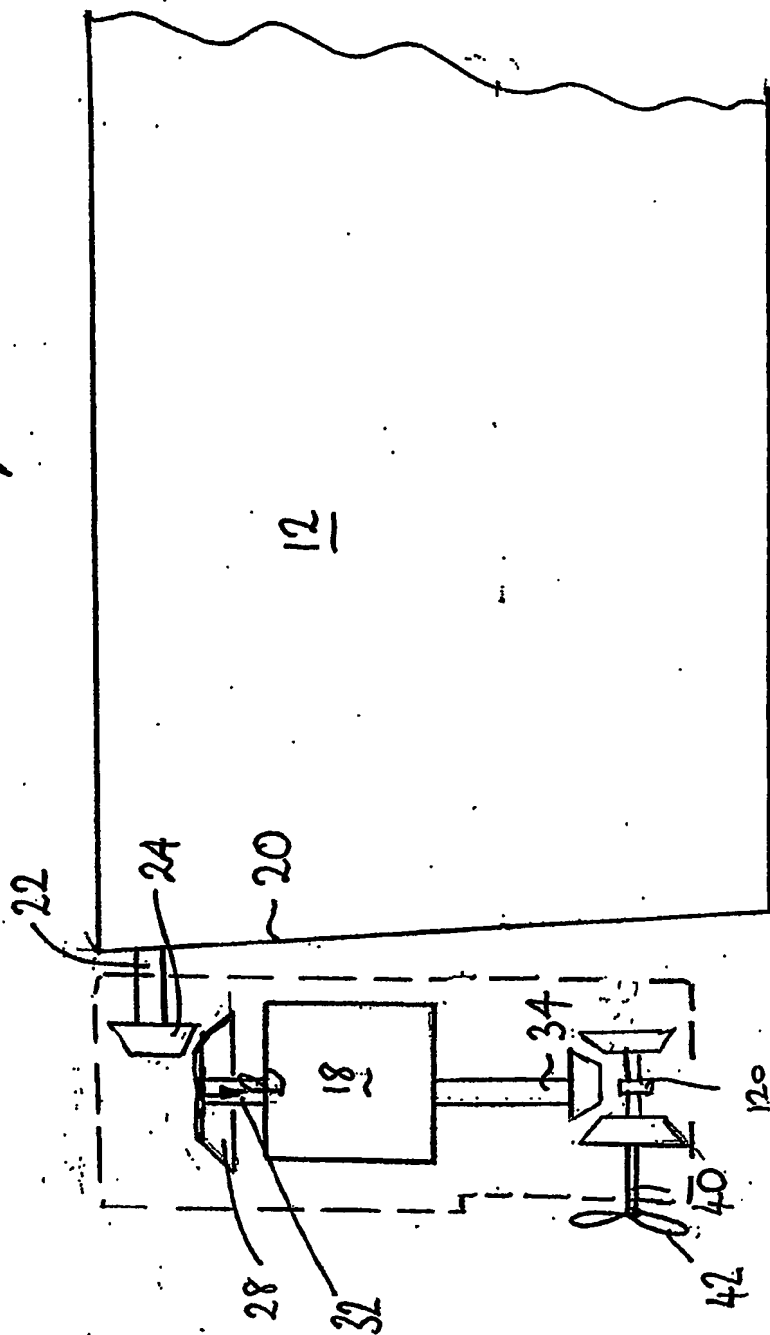


Figure 6

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/AU04/000978

International filing date: 21 July 2004 (21.07.2004)

Document type: Certified copy of priority document

Document details: Country/Office: AU
Number: 2003903788
Filing date: 22 July 2003 (22.07.2003)

Date of receipt at the International Bureau: 08 December 2004 (08.12.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse